


Printing to PowerRIP 2000 from FreeHand 8.x using Win 95/98

Note: It is assumed that a FreeHand file is on the screen and ready to be printed.

Step 1:

File>Printer Setup

The Printer Setup dialog will display.
Select your printer.

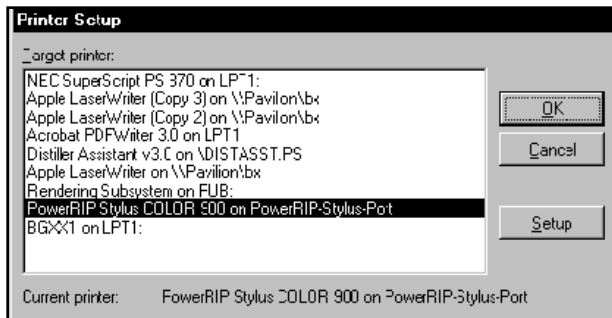


Step 2:

File>Print

The Print dialog will display.
Select Print to File

Note:Freehand sends header information along with the PostScript file when the print command is executed. This creates various PostScript errors. Print to File circumvents this header information and allows you to print FreeHand files to your printer. For ease of operation create a new folder on your hard drive to house your FreeHand PostScript files.

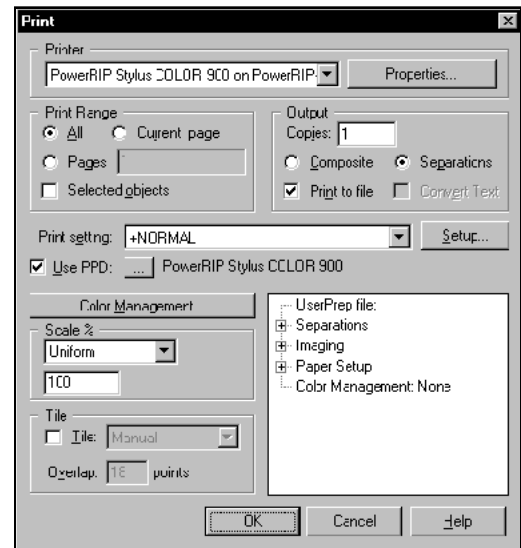

Printing to PowerRIP 2000 from FreeHand 8.x using Win 95/98 (Cont)


Step 3:

Click **Properties** in the top right corner of the Print dialog.

The **PowerRIP 2000 Properties** dialog will display.

Paper Tab


Select the appropriate **Page Size**.

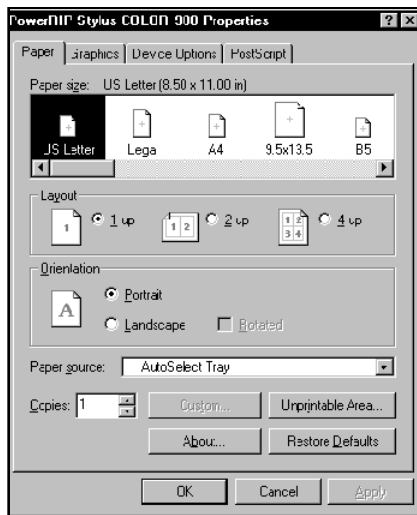

Step 4:

Graphics tab

Select the appropriate **resolution**.

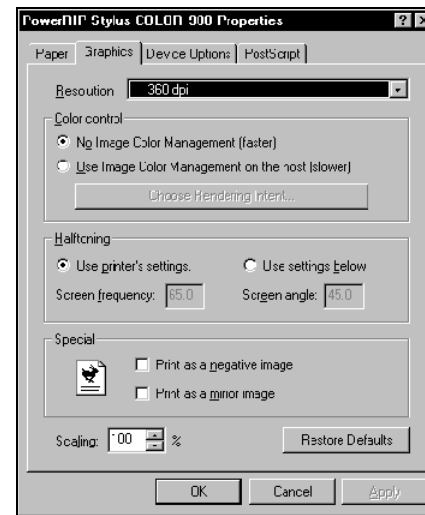


Step 5:

Device Options Tab

Select the features appropriate for your needs.

This is a scrollable dialog. Do not leave any features as Printer Default. Define each feature.

Click **OK**.

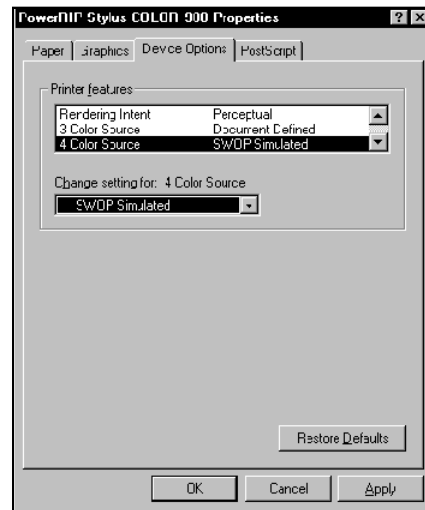


Printing to PowerRIP 2000 from FreeHand 8.x using Win 95/98 (Cont)

Step 6:


The Print dialog will redisplay.
Select **Use PPD**.
Click on the little box, with the 3 dots, to the right of Use PPD. The **Select PPD** dialog will display. Highlight the PPD for your printer.
Click **Open**.

Note: Navigate to **PRPC2000EPSON>PPD>US** and select the appropriate PPD.
French, German, and UK PPD folders also can be found in the PPD folder.

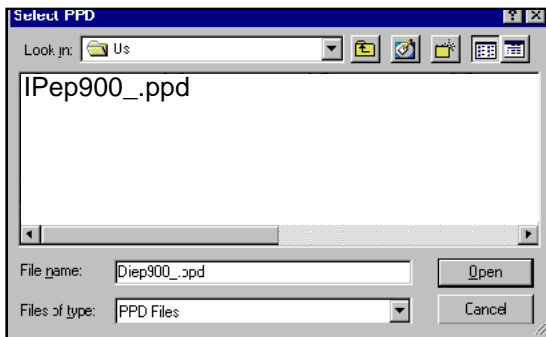


Step 7:

The Print dialog will redisplay.
This dialog should reflect all the choices you have made in steps 1 through 6.
Click **OK**.

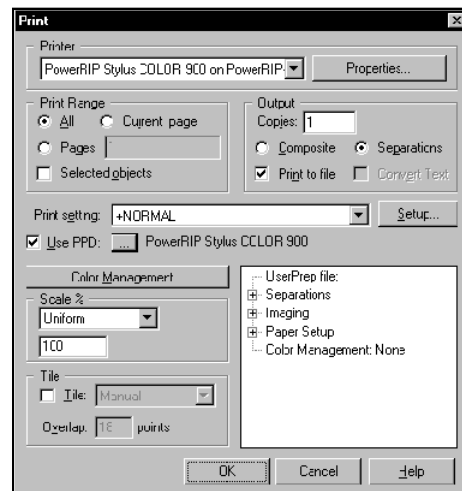

Step 8:

The **Print to File** dialog will display.
Navigate to the folder your created for your PostScript files. Give your PostScript file a name.
Click **Save**.
The PostScript file will be saved to the folder.

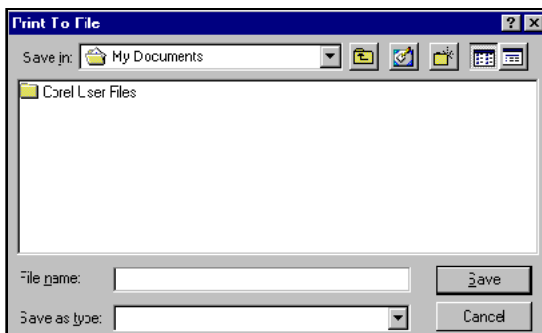

Step 9:

Launch PowerRIP 2000.
Start>Programs>PowerRIP 2000 for Epson Series>PowerRIP 2000 for Epson Stylus Series.
Maximize PowerRIP 2000

Printing to PowerRIP 2000 from FreeHand 8.x using Win 95/98 (Cont)

Step 10:

Go to **File>Print PostScript File**.

The **Open** dialog will display.

Navigate to the folder you saved your file in.

Highlight the PostScript file you wish to print.

Click **Open**.

The **Configure Document Specs** dialog will display.

Make sure the correct port is defined in **On**.

Click **OK**.

Your file will process and print.

